



OWTS PROFILE HOLE EXCAVATIONS

PROFILE HOLE #1 (8' DEEP)

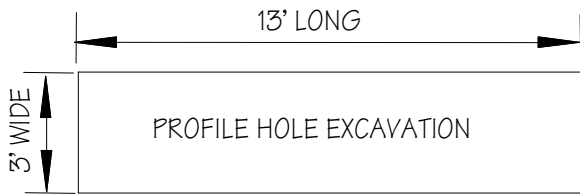


PLAN VIEW

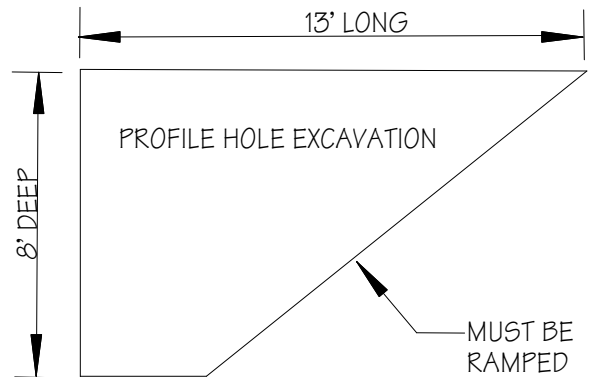


PROFILE VIEW

MUST BE
RAMPED
FOR
ACCESS

PROFILE HOLE #2 (5' DEEP)

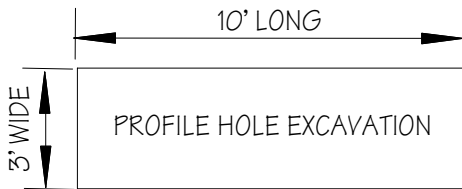

PLAN VIEW

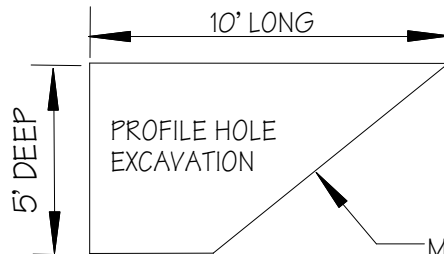

PROFILE VIEW

MUST BE
RAMPED
FOR
ACCESS

NOTES:

A MINIMUM OF 2 PROFILE HOLES SHOULD BE EXCAVATED IN THE PROPOSED ABSORPTION FIELD

One (1) 8 FOOT DEEP at least 3 FEET WIDE.

One (1) 5 FOOT DEEP at least 3 FEET WIDE.

BOTH MUST BE RAMPED ON ONE END FOR ACCESS

PROFILE HOLES SHOULD REMAIN OPEN FOR EVALUATION BY THE LOCAL PUBLIC HEALTH AGENCY, IF REQUIRED BY THE AGENCY

SPECIFICATION FROM COLORADO ON-SITE WASTEWATER TREATMENT SYSTEM REGULATION #43, SECTION 43.5.D.3.a

